


MJM International Corporation AW-S-M-L

Assembly Instructions

IDENTIFY COMPONENTS TO START ASSEMBLY

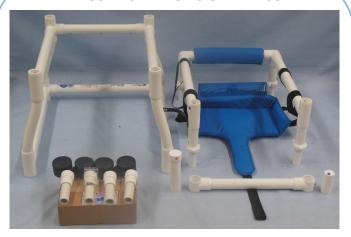

- **BOTTOM FRAME.**
- TOP FRAME WITH SEAT.
 - FRONT GATE WITH PVC POST.
 - **BOX WITH CASTERS AND SCREWS**
 - 2 CASTERS WITH BRAKES.
 2 CASTERS NON BRAKE.

STEP 1 - CASTERS



INSERT CASTER SOCKETS INTO BOTTOM FRAME.

NOTE: A PHILLIPS SCREWDRIVER OR A CORDLESS HAND DRILL IS REQUIRED TO TIGHTEN / SECURE ALL SCREWS.

STEP 2 CASTERS.



DRILL THROUGH CASTER SOCKETS USING 1/8 DRILL BIT AND PILOT HOLES AS REFERENCE.



SECURE USING 1/2" RETAINING SCREWS AND PILOT HOLES AS REFERENCE.

STEP 3 STROLLER TOP FRAME ASSEMBLY



- REMOVE SCREWS FROM BOTTOM FRAME.
- INSERT TOP FRAME INTO BOTTOM FRAME, ALIGN PREDRILLED HOLES.
- SECURE WITH SCREWS PROVIDED.







MJM International Corporation

AW-S-M-L

Assembly Instructions

STEP 4 SEAT & GATE



SECURE SEAT WITH SNAPS PROVIDED.

REMOVE SCREW FROM CORNER T FITTING.

INSERT PVC PIPE INTO CORNER T FITTING, ALIGN USING COLOR CODED DOTS.





STEP 5 GATE.





- INSERT PVC PIPE INTO CORNER T FITTING, ALIGN USING COLOR CODED DOTS.
- SECURE PVC PIPE WITH SCREW PROVIDED.

STEP 6 SEAT STRAP



SECURE SEAT STRAP BY SLIDING IT OVER THE FRONT GATE BAR.



SECURE GATE BAR WITH STRAP PROVIDED.

STEP 7



PRODUCT COMPLETELY ASSEMBLED

NOTE: CASTERS, TOP FRAME, BOTTOM FRAME, SEAT, SEAT STRAP, GATE, MUST BE CHECKED AND SECURED PRIOR TO USING SHOWER CHAIR.

Rev: 1.3